


Rabbit 2

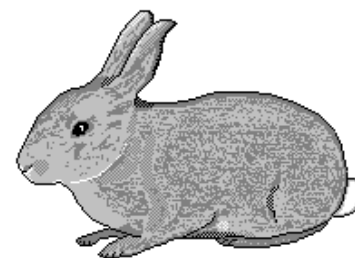


NMEA 0183 / RS232C interface.

The Rabbit (Rabbit - Lepus Cuniculus) is a small animal who has a delicious taste for carrots and electrical wires.

Rabbit 2 is a bi-directional interface that converts the logical levels of NMEA 0183 to RS232C levels and vice versa.

Rabbit 2 makes it possible for a computer to communicate with marine equipment, through the NMEA 0183 protocol.

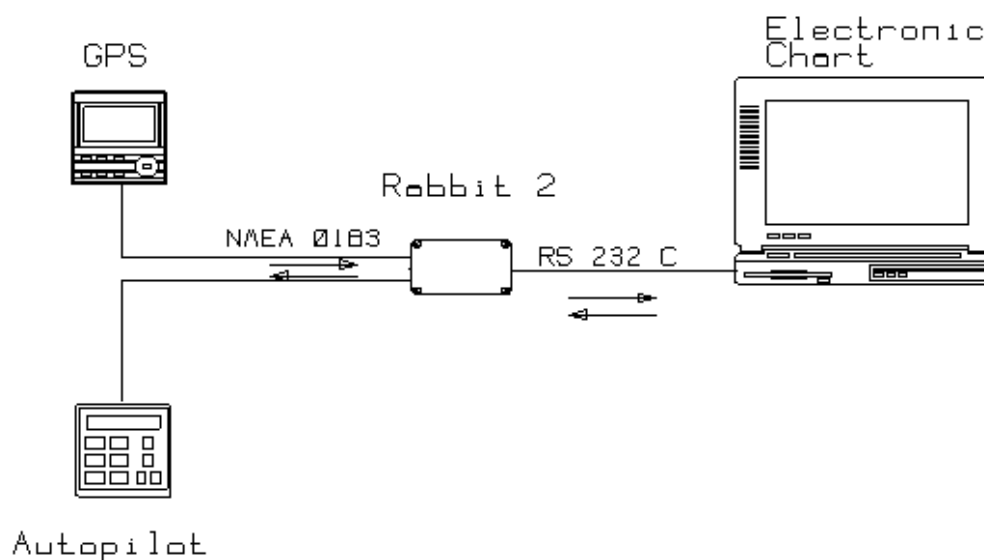

Specification.

Power supply:	9 - 33 Volt DC
Current consumption:	< 30 mA
Temp.range:	-20°C - 70°C
Kapsling:	120 x 60x 25 mm, metal case.
Input signal:	NMEA 0183 / RS232C.
Output signal:	RS232C / NMEA 0183.
Connection:	Terminal strip.

MARIN ELEKTRONIK

TAVELSJÖVÄGEN 18 120 59 ÅRSTA STOCKHOLM SWEDEN
 PHONE: 08-6455544 INT: +46-8-6455544 FAX: 08-187955 INT: +46-8-187955
 eMail: info@marinelektronik.se Homepage: www.marinelektronik.se