


Rabbit 4

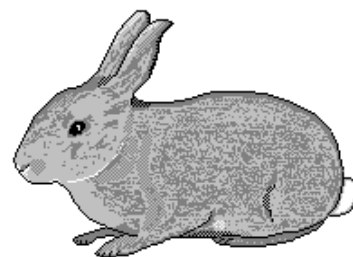

NMEA to RS422 interface.

The Rabbit (Rabbit - Lepus Cuniculus) is a small animal who has a delicious taste for carrots and electrical wires.

Rabbit 4 is a interface that converts the logical levels of NMEA to the RS422 differential levels. Can be ordered with one to three interface on the pcb.



Specification.

| | |
|----------------------|------------------------------|
| Power supply: | 9 - 28 Volt DC |
| Current consumption: | < 20 mA |
| Temp.range: | -20°C - 70°C |
| Kapsling: | 120 x 60x 25 mm, metal case. |
| Input signal: | NMEA 0183 Optocoupler |
| Output signal: | NMEA 0183 RS422 x 1-3. |
| Connection: | Terminal strip. |

MARIN ELEKTRONIK

TAVELSJÖVÄGEN 18 120 59 ÅRSTA STOCKHOLM SWEDEN
 PHONE: 08-6455544 INT: +46-8-6455544 FAX: 08-187955 INT: +46-8-187955
 eMail: info@marinelektronik.se Homepage: www.marinelektronik.se