



Rabbit 5

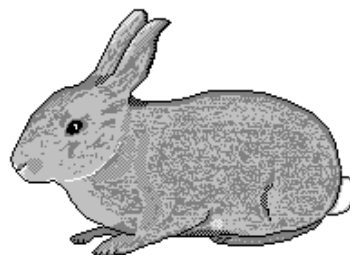

NMEA to RS422 interface. Isolated output.

The Rabbit (*Lepus Cuniculus*) is a small animal who has a delicious taste for carrots and electrical wires.

Rabbit 5 is an interface that converts the logical levels of NMEA 0183 to the RS422 differential levels. Rabbit5 can be ordered with one to three separate interfaces, which are isolated from each other and from the power source. Rabbit5-1 is equipped with a single channel.

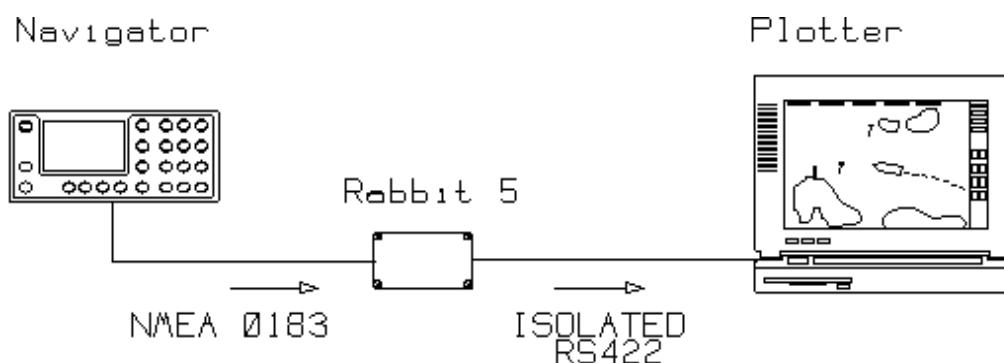

Specification.

Power supply:	22-32 Volt DC	
Current consumption:	max 200 mA	
Temp.range:	-20°C - 70°C	
Case:	120 x 60x 25 mm, metal case.	
Input signal:	NMEA 0183 Optocoupler	1-3 converter
Output signal:	NMEA 0183 RS422.	Isolated outputs.
Connection:	Terminal strip.	

MARIN ELEKTRONIK

TAVELSJÖVÄGEN 18 120 59 ÅRSTA STOCKHOLM SWEDEN
 PHONE: 08-6455544 INT: +46-8-6455544 FAX: 08-187955 INT: +46-8-187955
 eMail: info@marinelektronik.se Homepage: www.marinelektronik.se